



READ THE LABEL BEFORE USE

BarrierGuard Surface Coating is a modified cement for masonry and metal applications. It is not a GAF acrylic coating.

PRECAUTIONARY STATEMENTS: See back of bucket of other use. Do not breathe dust. Do not get in eyes. Do not get on skin. Do not get on clothes. Do not get on shoes. Do not get on car. Do not get on furniture. Do not get on anything you do not want to be stained. Do not get on anything you do not want to be damaged. Do not get on anything you do not want to be discolored. Do not get on anything you do not want to be scratched. Do not get on anything you do not want to be stained. Do not get on anything you do not want to be damaged. Do not get on anything you do not want to be discolored. Do not get on anything you do not want to be scratched.



BarrierGuard® Surface Coating

WARRANTY

WARRANTY BASIS FOR LIMITED WARRANTY

WARRANTY BASIS FOR LIMITED WARRANTY

Number of Years	5 Year
Number of Gallons per Square Foot	8
Dry Film Thickness, Mils	50

TEMPERATURE LIMITS

Application Temperature	40°F - 90°F (4°C - 32°C)	Do NOT heat containers
Storage Temperature	40°F - 90°F (4°C - 32°C)	Cool temps/high humidity may slow curing.
Minimum Temperature	40°F - 90°F (4°C - 32°C)	Do NOT allow coating to freeze. Stir in well reconstituted areas.

Professional Grade
5.0 Gallons (18.9 L) / VOC: < 50 g/L

PRECAUTIONARY STATEMENTS: See back of bucket of other use. Do not breathe dust. Do not get in eyes. Do not get on skin. Do not get on clothes. Do not get on shoes. Do not get on car. Do not get on furniture. Do not get on anything you do not want to be stained. Do not get on anything you do not want to be damaged. Do not get on anything you do not want to be discolored. Do not get on anything you do not want to be scratched. Do not get on anything you do not want to be stained. Do not get on anything you do not want to be damaged. Do not get on anything you do not want to be discolored. Do not get on anything you do not want to be scratched.

FOR PROFESSIONAL AND OUTDOOR USE ONLY
KEEP OUT OF REACH OF CHILDREN



State of Florida Approved



BARRIERGUARD® SURFACE COATING

SLURRY-ONLY APPLICATION

GAF BARRIERGUARD® SURFACE COATING SLURRY-ONLY APPLICATION



BarrierGuard®
Item # 890075000 - 2-GAL
Item # 890076000 - 5-GAL

Slurry Only Application	6 SQ per pail
-------------------------	---------------



Applied via slurry-only method, bonds directly to exposed, unsealed structural concrete—no fabric required. It enhances adhesion for the HydroStop Liquid-Applied Roof System and other GAF coatings.


There's a liquid solution for your roof

BARRIERGUARD® Requires Mixing



1-part (1-gal)

+

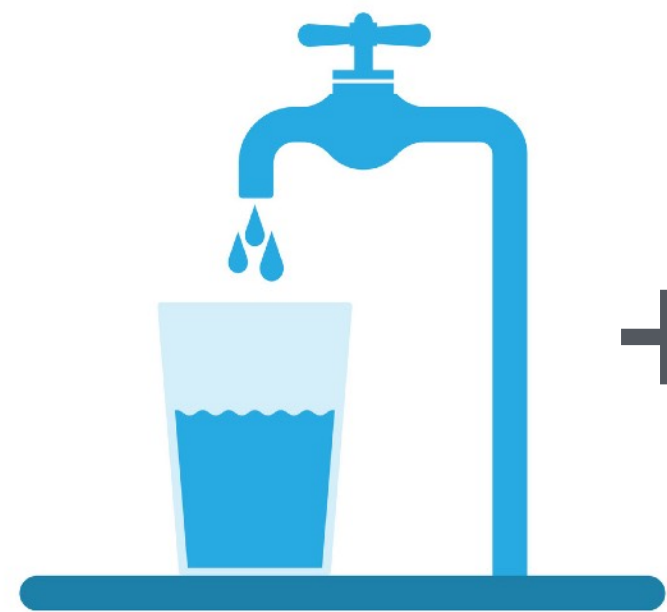

1-part (1-gal)

+



3-part (3-gal)

Mixed with water and Portland cement,
BarrierGuard® forms a cementitious slurry

One gallon of BarrierGuard® will make approximately
four (4) gallons of slurry



MIXING + BARRIERGUARD®



1-part (1-gal)

+



1-part (1-gal)

+



3-part (3-gal)

Mixed with water and Portland cement, BarrierGuard® forms a cementitious slurry
One gallon of BarrierGuard® will make approximately four (4) gallons of slurry





BARRIERGUARD® Surface Coating

SLURRY-ONLY APPLICATION



1st COAT



2nd COAT

Apply 2nd coat when 1st coat is dry enough to walk on

There's a liquid solution for your roof



BARRIERGUARD® Surface Coating

SLURRY-ONLY APPLICATION



1 HOUR DRY TIME



72 HOUR CURE TIME

There's a liquid solution for your roof



BARRIERGUARD® Surface Coating

SLURRY ONLY VERTICAL APPLICATION



1st COAT



2nd COAT



LIQUID-APPLIED

ROOFING & WATERPROOFING

Daniel Peña

GET PEACE OF MIND WITH A GAF PRO

305.812.6865

daniel.pena@gaf.com



Photo taken at #WALLOFWIND

There's a liquid solution for your roof - talk to GAF first