


12"x12" REINFORCING  
FABRIC WITH PIPE HOLE  
IN CENTER

REINFORCING FABRIC  
PIPE WRAP




①.

②.

①. REINFORCING FABRIC  
PIPE WRAP.

6" HIGH  
MINIMUM

PIPE, THROUGH  
ROOF DECK

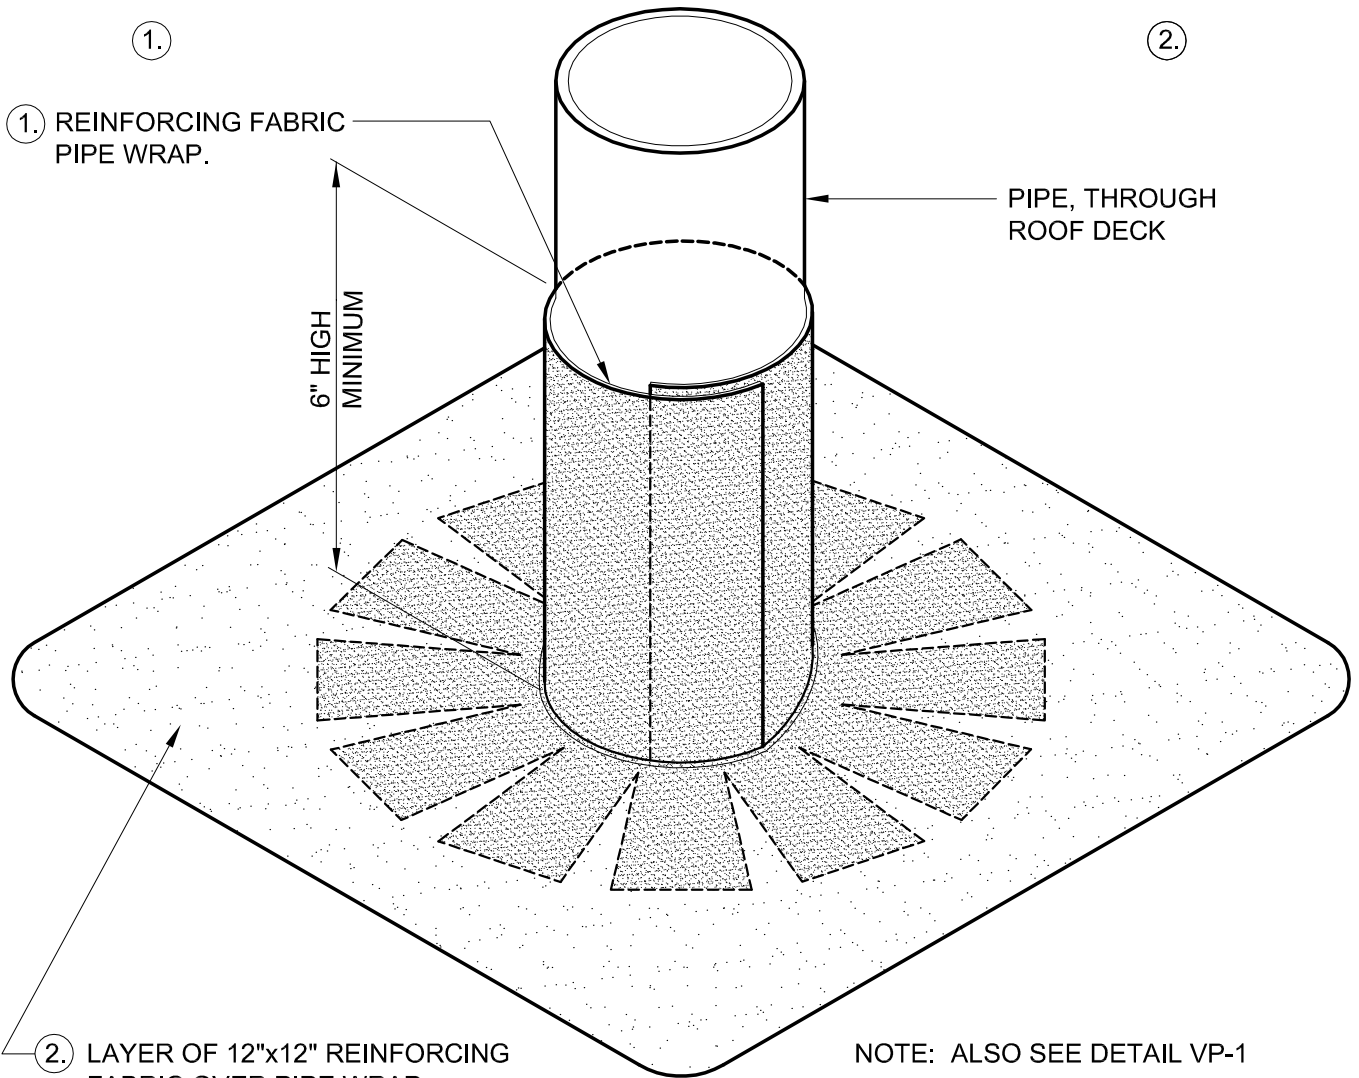

②. LAYER OF 12"x12" REINFORCING  
FABRIC OVER PIPE WRAP.

NOTE: ALSO SEE DETAIL VP-1

ISOMETRIC VIEW

NOTES:

1. PREMIUM COAT SYSTEM- FOUNDATION COAT, FABRIC, FOUNDATION COAT, AND FINISH COAT COMPONENTS.
2. FOUNDATION COAT- COMBINED COVERAGE (2 COATS) AT MINIMUM RATE OF 40 SF/GALLON.
3. FINISH COAT- COMBINED COVERAGE (2 COATS) AT MINIMUM RATE OF 70 SF/GALLON.
4. PRIMING- REFER TO HYDROSTOP SPECIFICATIONS FOR DECK PRIMING REQUIREMENTS.

**HYDRO  
STOP**

**PREMIUM COAT SYSTEM**

TYPICAL VENT PIPE FLASHING DETAIL  
10 YEAR SYSTEM

DATE:

08/20/10

SHEET No :

VP-2-10